

2MP 36X PTZ CAMERA

Stainless Steel 316L 2MP 36X Pan/Tilt/Zoom Camera



VTL-2PF36N

Key Features

- AISI 316L Electro Polished Stainless Steel
- 2MP H.265 Network 36X Zoom PTZ
- Optical 36X Zoom, 6 ~ 216mm
- 55.9°(H) / 33.6°(V)
- 360 degree Endless Pan / 180 degree Tilt
- Shock and Vibration Tested
- Tempered Glass
- Built In Wiper
- Night Vision Up To 100M
- Optional Powers 24VDC
- IP66/67
- -40°C~60°C



VTL-2PF36N

PRODUCT SPECIFICATIONS

VTL-2PF36N

Camera

- **Image sensor**
1/2" Sony Exmor CMOS
- **Scanning mode**
Progressive scan
- **Lens**
Optical zoom 36x, 6.0-216mm
± 5%, F1.5
- **Digital zoom**
8x
- **Angle of view**
H: 56.5°-2.1° / V: 33.6°-1.2°
- **Shutter speed**
Automatic/ Manual
1/30,000sec - 1/30sec
- **Day/night**
ICR(auto/day/night)
- **Min. illumination**
Color:0.05Lux,
B/W: 0Lux(IR LED)
- **Camera setting**
DOL HDR, DNR, BLC, HLC,
White balance, Exposure
control, Mirror, Flip, Privacy
masking, Corridor format, LDC,
OSD
- **Analytics**
Tamper, Video motion detection
- **IR distance**
IR LED 100m
- **PTZ**
Pan: 360° endless, Tilt: ±90°
Pan/tilt speed: 1.8°-30°/sec
Preset: 226
System accuracy: 0.06°

Video


- **Compression**
H.265(Main profile), H.264(High,
Main, Base line profile), MJPEG
- **Resolution**
1920x1080, 1280x720, 1024x576,
768x432, 704x392, 640x360,
384x216
- **Frame rate**
Max. 60(50)fps@1920x1080
- **Streaming**
Simultaneously H.265, H.264 and
MJPEG (Triple streaming)
Independent Frame Rate and
Bandwidth Control, VBR/CBR

Network

- **Security**
Multi User Authority, IP Filtering,
HTTPS
- **Protocol**
TCP/IP, UDP, IPv4/v6, HTTP,
HTTPS, FTP, UPnP, RTP, RTSP,
RTCP, DHCP, ARP, Zeroconf
- **API**
Open API, ONVIF profile S, T

MAIN CERTS

- CE
- FCC
- KC
- IP66/67
- RUSSIA MARITIME SHOCK /
VIBRATION STD TESTED
- RUSSIA MARITIME EMI
TESTED
- MIL-STD-810G SHOCK /
VIBRATION TESTED

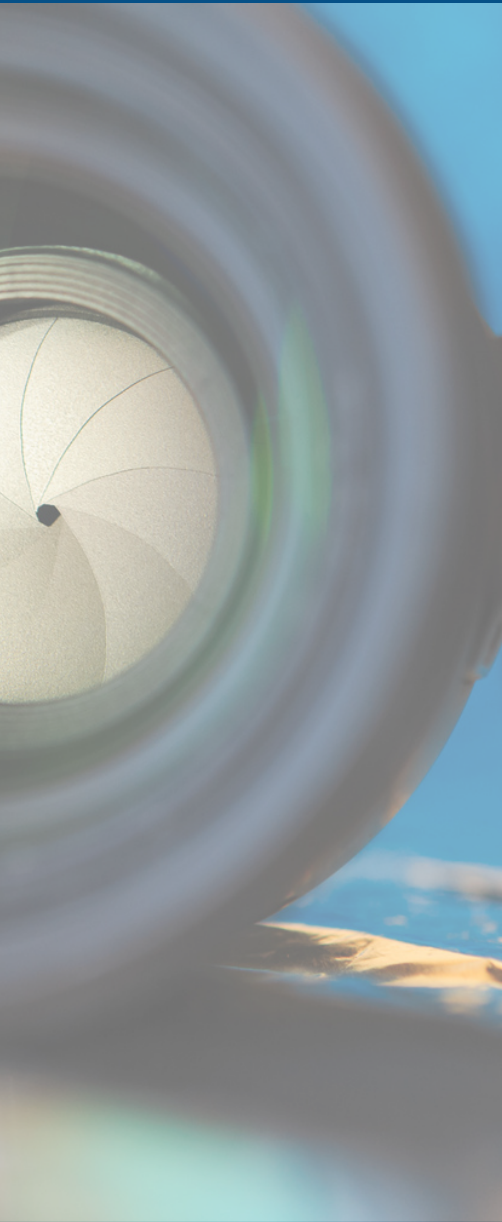

General

- **Connectors**

Ethernet RJ-45(10/100/1000Base-T)

Power 2pin terminal block

- **Power supply**

24VDC

- **Power consumption**

50W(80W with water tank operation)

- **Operating humidity**

0-90% RH(Non-condensing)

- **Operating temperature**

-40°C - +60°C

- **Ingress protection**

IP66/67

- **Dimension**

320(W)x345(H)x299(D)mm

- **Weight**

Approx. 18Kg

- **Certification**

CE, FCC, KC

OPTIONAL ACCS

ASIS 316L JB



ASIS 316L WATER TANK

